



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDS-322-017 REV: 1.0

## 0.3" Single Digit Displays

MODEL NO : ELS-322SDRWA/S530-A2 ECN : \_\_\_\_\_ Page: 1/5

### ■ Features :

- Industrial standard size.
- Low power consumption.
- Categorized for luminous intensity.

### ■ Applications:

- Audio equipment
- Instrument panels
- Digital read out display

### ■ Description :

- The ELS-322series is a large 7.62mm (0.3")high seven segment display design for viewing distances up to 7 meters.
- These displays provide excellent reliability in bright ambient light .
- These device is made with white segments and gray surface.

PART NO	CHIP		C.C. or C.A.
	Material	Emitted Color	
ELS-322SDRWA/S530-A2	AlGaInP	Super Deep-Red	C.A.

OFFICE : NO. 25,Lane 76,Sec.3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936


FAX : 886-2-2267-6244,22676189,22676306

<http://www.everlight.com>




0.3" Single Digit Displays

■ Package Dimension:

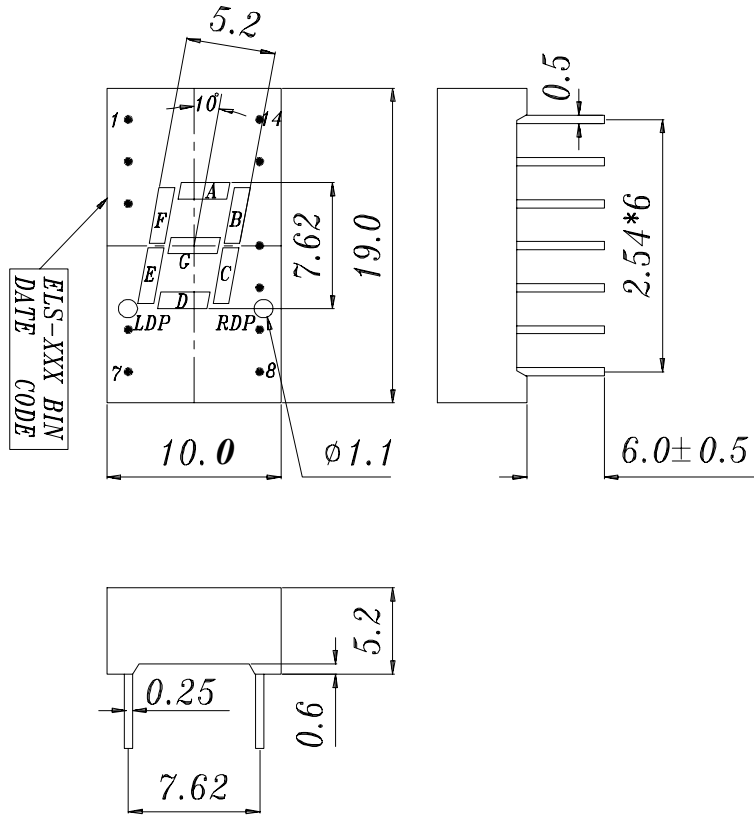

- COMMON ANODE
- 1 CATHODE A
  - 2 CATHODE F
  - 3 COMMON ANODE
  - 4 NO PIN
  - 5 NO PIN
  - 6 CATHODE LDP
  - 7 CATHODE E
  - 8 CATHODE D
  - 9 CATHODE RDP
  - 10 CATHODE C
  - 11 CATHODE G
  - 12 NO PIN
  - 13 CATHODE B
  - 14 COMMON ANODE

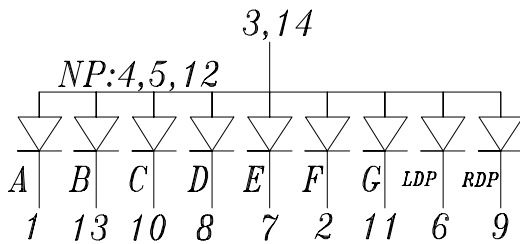

■ NOTES:

1. All dimensions are millimeters, tolerance is 0.25mm unless otherwise noted.
  2. Above specification may be changed without notice.
- Supplier will reserve authority on material change for above specification.



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDS-322-017 REV: 1.0

0.3" Single Digit Displays

MODEL NO : ELS-322SDRWA/S530-A2 ECN : \_\_\_\_\_ Page: 3/5

## Absolute maximum ratings at Ta = 25°C :

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	If	25	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	160	mA

## Electronic optical characteristics :

Parameter		Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous Intensity	Per segment	Iv	0.45	0.8	----	mcd	If=2mA
			2.80	15.1	----	mcd	If=10mA
	Per decimal point		0.11	0.28	----	mcd	If=2mA
			1.05	5.6	----	mcd	If=10mA
Peak Wavelength		$\lambda p$	----	650	----	nm	If=20mA
Dominant Wavelength		$\lambda d$	----	639	----	nm	If=20mA
Spectrum Radiation Bandwidth		$\Delta \lambda$	----	20	----	nm	If=20mA
Forward Voltage		Vf	----	2.0	2.4	V	If=20mA
Reverse Current		Ir	----	----	10	$\mu A$	Vr=5V



# EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DDS-322-017 REV: 1.0

0.3" Single Digit Displays

MODEL NO : ELS-322SDRWA/S530-A2 ECN : \_\_\_\_\_ Page: 4/5

■ Reliability test item and condition:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∩ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∩ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1

--	--	--	--	--	--



Device Number : DDS-322-017 REV: 1.0

0.3" Single Digit Displays

MODEL NO: ELS-322SDRWA/S530-A2 ECN :                      Page: 5/5

## Typical Electro-Optical Characteristic Curves:

SDR

