



LED Display Product Data Sheet LTG-Y2K31M

Spec No.: DS30-2001-126

Effective Date: 09/15/2001

Revision: -

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4

FEATURES

- * 0.27 INCH (7.0 mm) DIGIT HEIGHT.
- * CONTINUOUS UNIFORM SEGMENTS.
- * LOW POWER REQUIREMENT.
- * EXCELLENT CHARACTERS APPEARANCE.
- * HIGH BRIGHTNESS & HIGH CONTRAST.
- * WIDE VIEWING ANGLE.
- * SOLID STATE RELIABILITY.


DESCRIPTION

The LTG-Y2K31M is a 0.27 inch (7.0 mm) digit height seven-segment display. The device is multi-color applicable display. The green LED chips, which are made from GaP on a transparent GaP substrate. The red orange & amber LED chips, which are made from GaAsP on a transparent GaP.

DEVICE

PART NO.	DESCRIPTION
MULTI-COLOR	Multiplex Common Anode
LTG-Y2K31M	

PACKAGE DIMENSIONS

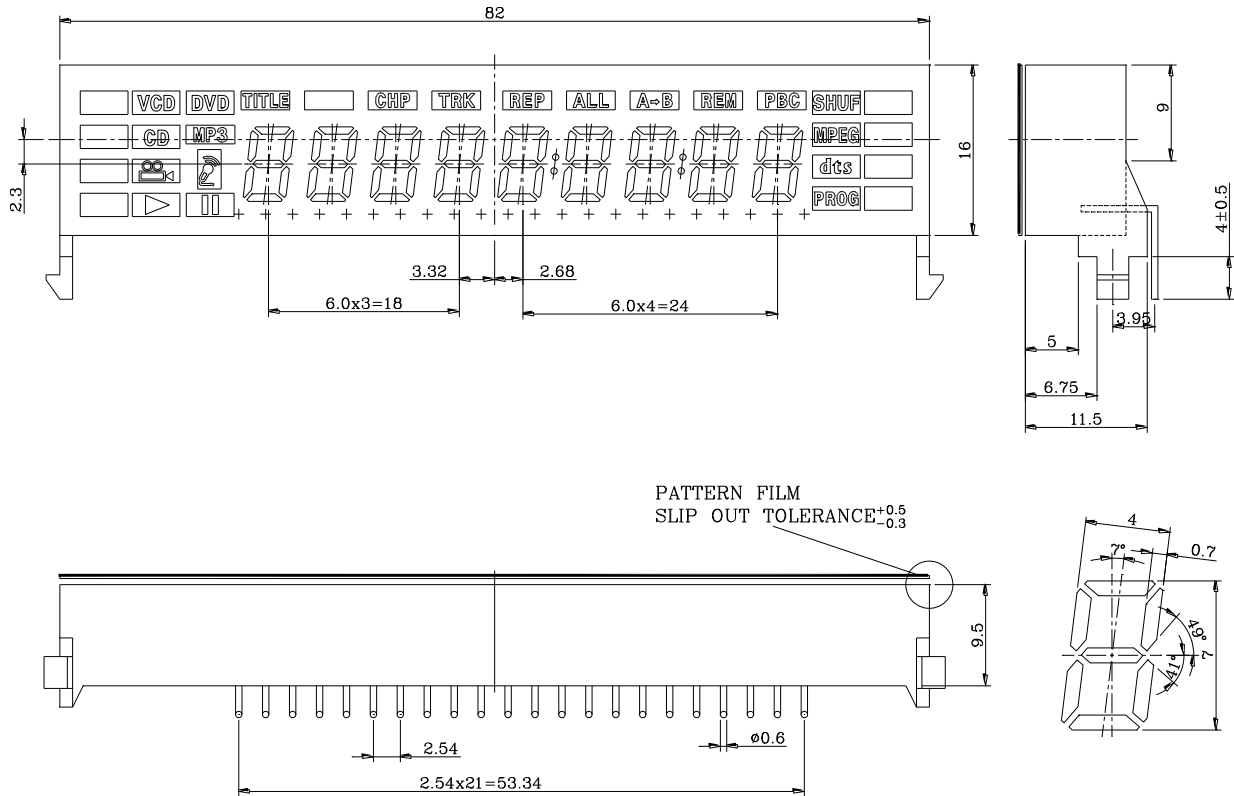

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.

PIN CONNECTION

No.	CONNECTION
1	COMMON ANODE (DIGIT 13,14)
2	COMMON ANODE (DIGIT 1,7)
3	CATHODE B
4	COMMON ANODE (DIGIT 2,8)
5	CATHODE C
6	CATHODE E
7	COMMON ANODE (DIGIT 3,9)
8	CATHODE F
9	COMMON ANODE (DIGIT 4,10)
10	CATHODE A
11	COMMON ANODE (DIGIT 5,11)
12	CATHODE D
13	CATHODE G
14	COMMON ANODE (DIGIT 6,12)
15	CATHODE F
16	CATHODE D
17	CATHODE E
18	CATHODE G
19	NO CONNECTION
20	CATHODE A
21	CATHODE C
22	CATHODE B

ABSOLUTE MAXIMUM RATING AT T_a=25°C

PARAMETER	GREEN	RED ORANGE	AMBER	UNIT
Power Dissipation Per Chip	75	75	75	mW
Peak Forward Current Per Chip (1/10 Duty Cycle, 0.1ms Pulse Width)	100	100	100	mA
Continuous Forward Current Per Chip	25	25	25	mA
Derating Linear From 25°C Per Chip	0.28	0.28	0.28	mA/°C
Reverse Voltage Per Chip	5	5	5	V
Operating Temperature Range	-35°C to +105°C			
Storage Temperature Range	-35°C to +105°C			
Solder Temperature: max 260°C for max 3sec at 1.6mm below seating plane				

ELECTRICAL / OPTICAL CHARACTERISTICS AT T_a=25°C

DIGIT(GREEN)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity Per Segment	I _v		930		μcd	I _F =10mA
Peak Emission Wavelength	λ _p		565		nm	I _F =20mA
Spectral Line Half-Width	Δλ		30		nm	I _F =20mA
Dominant Wavelength	λ _d		569		nm	I _F =20mA
Forward Voltage Per Chip	V _F		2.1	2.6	V	I _F =20mA
Reverse Current Per Chip	I _R			100	μA	V _R =5V
Luminous Intensity Matching Ratio	I _v -m			2:1		I _F =10mA

ICON(GREEN)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity Per Segment	I _v		1170		μcd	I _F =10mA
Peak Emission Wavelength	λ _p		565		nm	I _F =20mA
Spectral Line Half-Width	Δλ		30		nm	I _F =20mA
Dominant Wavelength	λ _d		569		nm	I _F =20mA
Forward Voltage Per Chip	V _F		2.1	2.6	V	I _F =20mA
Reverse Current Per Chip	I _R			100	μA	V _R =5V
Luminous Intensity Matching Ratio	I _v -m			2:1		I _F =10mA

ICON(RED ORANGE)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity Per Segment	I _v		1060		μcd	I _F =10mA
Peak Emission Wavelength	λ _p		630		nm	I _F =20mA
Spectral Line Half-Width	Δλ		40		nm	I _F =20mA
Dominant Wavelength	λ _d		621		nm	I _F =20mA
Forward Voltage Per Chip	V _F		2.0	2.6	V	I _F =20mA
Reverse Current Per Chip	I _R			100	μA	V _R =5V
Luminous Intensity Matching Ratio	I _v -m			2:1		I _F =10mA

ICON(AMBER)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity Per Segment	I _v		650		μcd	I _F =10mA
Peak Emission Wavelength	λ _p		610		nm	I _F =20mA
Spectral Line Half-Width	Δλ		35		nm	I _F =20mA
Dominant Wavelength	λ _d		602		nm	I _F =20mA
Forward Voltage Per Chip	V _F		2.1	2.6	V	I _F =20mA
Reverse Current Per Chip	I _R			100	μA	V _R =5V
Luminous Intensity Matching Ratio	I _v -m			2:1		I _F =10mA

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission Internationale De L'Eclairage) eye-response curve.

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

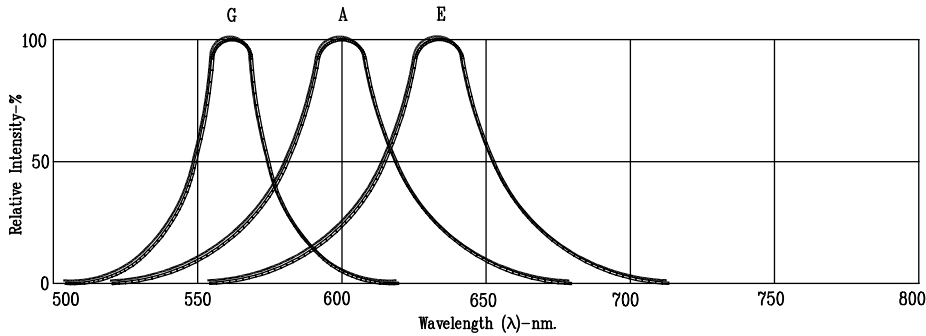


Fig1. RELATIVE INTENSITY VS. WAVELENGTH

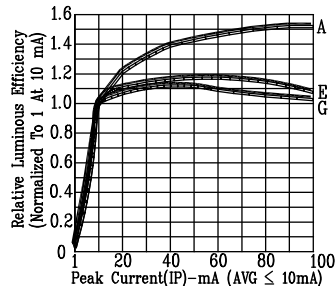


Fig2. RELATIVE LUMINOUS EFFICIENCY (LUMINOUS INTENSITY PER UNIT CURRENT) VS. PEAK CURRENT (REFRESH RATE 1KHz)

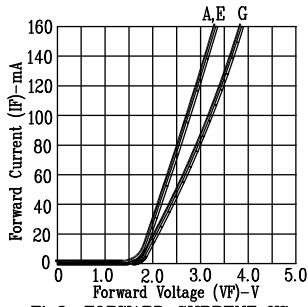


Fig3. FORWARD CURRENT VS. FORWARD VOLTAGE

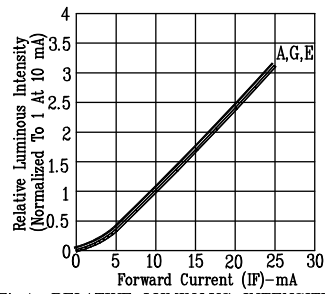


Fig4. RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

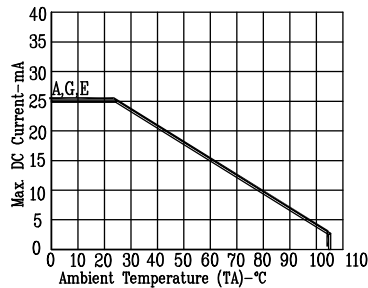


Fig5. MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE.

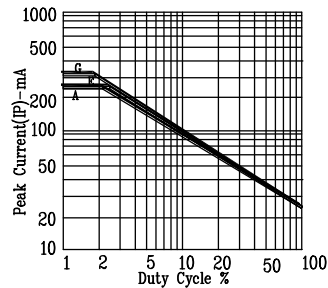


Fig6. MAX. PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE 1KHz)

NOTE: A=AMBER G=GREEN E=RED ORANGE