

**FEATURES**

- \* 1.85 INCH ( 47.0 mm) MATRIX HEIGHT.
- \* LOW POWER REQUIREMENT.
- \* EXCELLENT CHARACTERS APPEARANCE.
- \* HIGH BRIGHTNESS & HIGH CONTRAST.
- \* WIDE VIEWING ANGLE.
- \* SOLID STATE RELIABILITY.
- \* CATEGORIZED FOR LUMINOUS INTENSITY.
- \* STACKABLE VERTICALLY AND HORIZONTALLY


**DESCRIPTION**

The LTP-18088Y is a 1.85 inch ( 47.0 mm) matrix height 8 x 8 dot matrix displays. This device utilizes yellow LED chips, which are made from GaAsP on a transparent GaP substrate, and has a black face and white segments.

**DEVICE**


<b>PART NO.</b>	<b>DESCRIPTION</b>
YELLOW	Anode Column
LTP-18088Y	Cathode Row

## PACKAGE DIMENSIONS

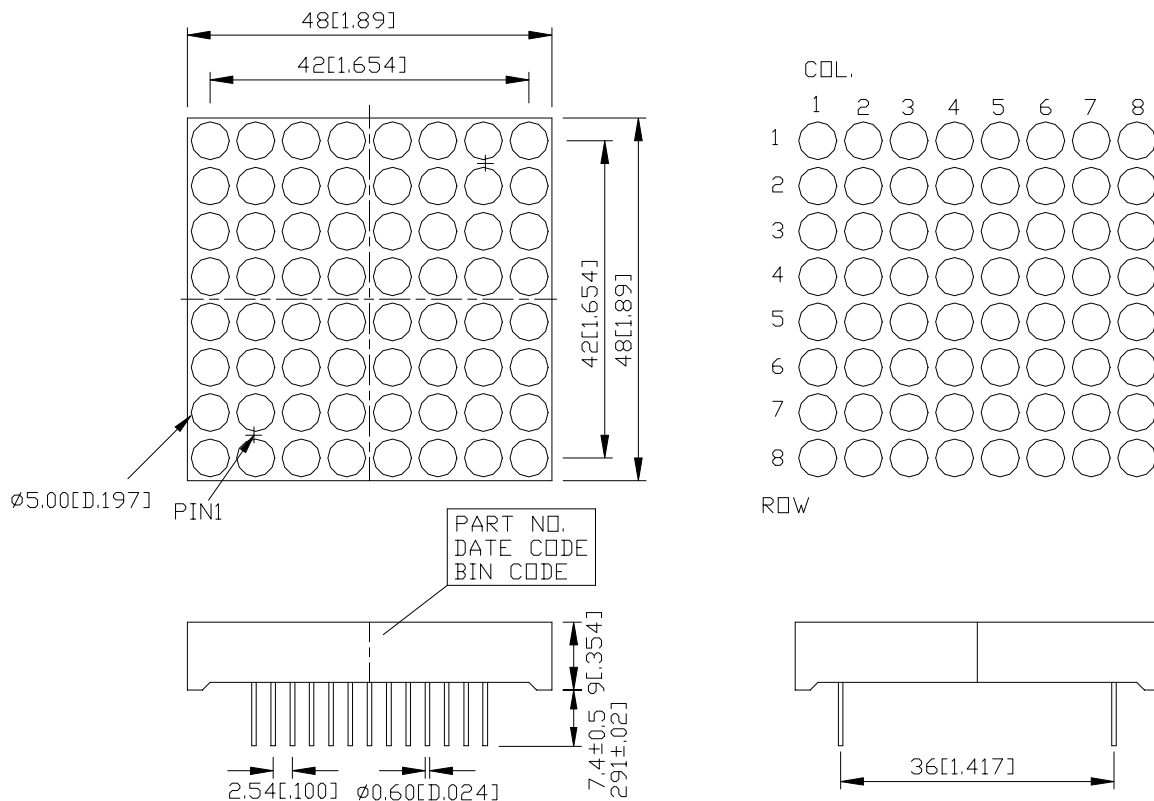

NOTES: All dimensions are in millimeters. Tolerances are  $\pm 0.25$ -mm (0.01") unless otherwise noted.

## INTERNAL CIRCUIT DIAGRAM

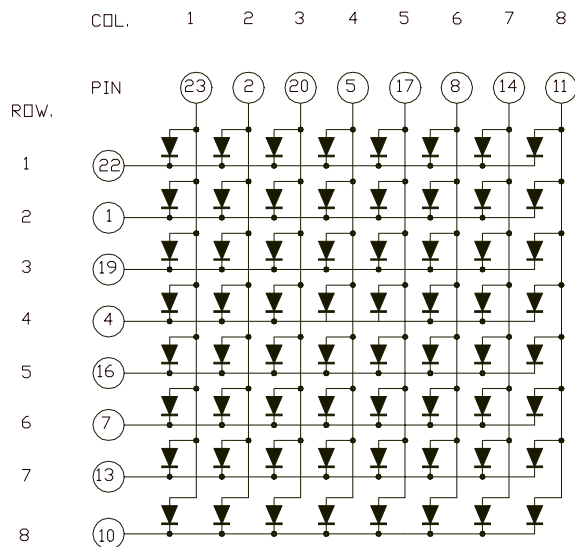

**PIN CONNECTION**

<b>NO</b>	<b>CONNECTION</b>	<b>NO</b>	<b>CONNECTION</b>
1	CATHODE ROW 2	13	CATHODE ROW 7
2	ANODE COLUMN 2	14	ANODE COLUMN 7
3	NO PIN	15	NO PIN
4	CATHODE ROW 4	16	CATHODE ROW 5
5	ANODE COLUMN 4	17	ANODE COLUMN 5
6	NO PIN	18	NO PIN
7	CATHODE ROW 6	19	CATHODE ROW 3
8	ANODE COLUMN 6	20	ANODE COLUMN 3
9	NO PIN	21	NO PIN
10	CATHODE ROW 8	22	CATHODE ROW 1
11	ANODE COLUMN 8	23	ANODE COLUMN 1
12	NO PIN	24	NO PIN

### ABSOLUTE MAXIMUM RATING AT T<sub>A</sub>=25°C

PARAMETER	MAXIMUM RATING	UNIT
Average Power Dissipation Per Dot	32	mW
Peak Forward Current Per Dot	80	mA
Continuous Forward Current Per Dot	10	mA
Derating Linear From 25°C Per Dot	0.12	mA/°C
Reverse Voltage Per Dot	5	V
Operating Temperature Range	-35°C to +85°C	
Storage Temperature Range	-35°C to +85°C	
Solder Temperature 1/16 inch Below Seating Plane for 3 Seconds at 260°C		

### ELECTRICAL / OPTICAL CHARACTERISTICS AT T<sub>A</sub>=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I <sub>v</sub>	1780	4800		μcd	I <sub>F</sub> =80mA , 1/16Duty
Peak Emission Wavelength	λ <sub>p</sub>		585		nm	I <sub>F</sub> =20mA
Spectral Line Half-Width	Δλ		35		nm	I <sub>F</sub> =20mA
Dominant Wavelength	λ <sub>d</sub>		588		nm	I <sub>F</sub> =20mA
Forward Voltage Per Dot	V <sub>F</sub>		2.1	2.6	V	I <sub>F</sub> =20mA
			3.0	3.7	V	I <sub>F</sub> =80mA
Reverse Current Per Dot	I <sub>R</sub>			100	μA	V <sub>R</sub> =5V
Luminous Intensity Matching Ratio	I <sub>v</sub> -m			2:1		I <sub>P</sub> =80mA , 1/16Duty

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision International De L'Eclairage) eye-response curve.

## TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

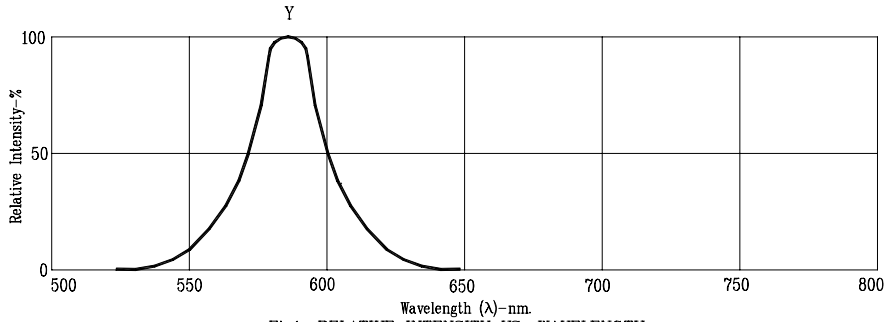


Fig1. RELATIVE INTENSITY VS. WAVELENGTH




Fig2. RELATIVE LUMINOUS EFFICIENCY (LUMINOUS INTENSITY PER UNIT CURRENT) VS. PEAK CURRENT (REFRESH RATE 1KHz)




Fig3. FORWARD CURRENT VS. FORWARD VOLTAGE




Fig4. RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT




Fig5. MAX AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE.




Fig6. MAX. PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE 1KHz)

NOTE : Y=YELLOW